

SLIDING BAR

SAM1525

SPECIAL FEATURES


- Adjustable and sliding handshower holder with ergonomic lock system
- Silver flexible hose cm 150 with 1/2" connection and conical nuts and anti-torsion system
- Abs handshower with anti-limestone system

WASTE

ACCESSORIES REQUIRED

PICTURE

TECHNICAL DRAWING

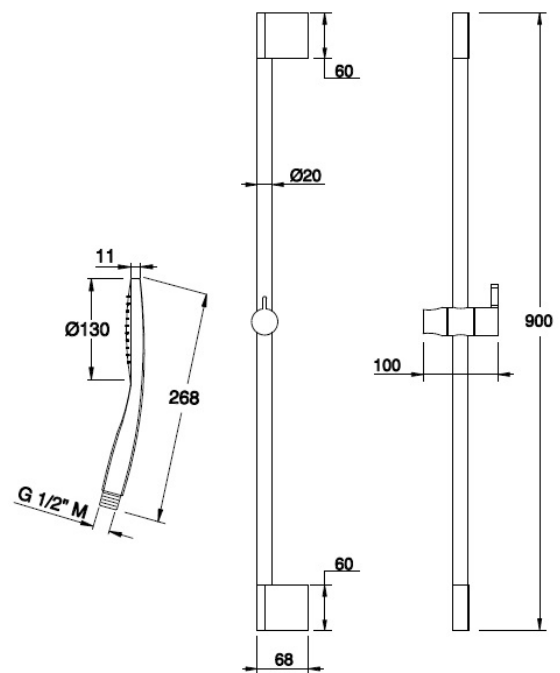

Operating conditions

- Minimum pressure 1 Bar
- Maximum pressure 5 Bar
- Recommended working pressure 3 Bar
- It is advisable to install a pressure reducing valve in case the pressure inside the ducts exceeds 5 Bar

- Remark: respect the parameters above mentioned; on the contrary the product could have some malfunctioning

General installation information

- In order for your product to work correctly over the time it's necessary cleaning the feed pipes from any treating impurities (Teflon, metal chips, hemp, etc) before installing the products
- Install strainer upstream; don't remove the filter fitted with the product.

Cleaning

- Use only water and neutral soap detergents to clean the mixer and dry it with sponge or soft cloth
- Never use alcohol solvents and solid or liquid substances or acids (acid chloridric), abrasive sponges, cloth with synthetic fibres, metallic sponge that could damage the chrome surfaces

Guarantee

- All the items commercialised by Frisone Srl are covered by "conventional guarantee" as indicated in the actual price list

Frisone Srl has the right to bring any change of shape, dimension and material on its own products.