













FLICKER HARMONICS TESTED

CB SCHEME OPERATED BY THE IEC SYSTEM OF CONFORMITY ASSESMENT SCHEMES OF ELECTRO TECHNICAL EQUIPEMENT & COMPONENT THE IECEE CB SCHEME IS AN INTERNATIONAL SYSTEM FOR MUTUAL ACCEPTANCE OF TEST REPORTS AND CERTIFICATES DEALING WITH THE SAFETY OF ELECTRICAL AND ELECTRONIC COMPONENTS EQUIPMENT AND PRODUCTS

SMART COMBI BOILER WITH CYLINDER

12 KW WALL HUNG ELECTRIC . INSTANTANEOUS AND CONTINUOUS HOT WATER

SMART BPL





H:- 875 W:- 660 D:- 300

SMART BPC





H:- 875 W:- 450 D:- 430

Both boilers have an in built 37.5ltr glass lined cylinder where ceramic Immersion heater is held in a dry pocket. (No contact with water)

COMFORT MODE

With 9 ltr of stored hot water for central heating, this gives you a total of 46.5ltr of stored hot water at 65 oC.

Instantaneous hot water, up to 13 ltr/min. Continuous hot water at 8ltr/min.

Once the hot water tap is opened, 46.5 ltr is at your disposal with immediate back up of 12kw energy to give you continuous hot water.





ECO MODE

37.5 litres of stored hot water at your disposal enough for 5-8 mins of showering, with re-generation of hot water in 30mins.

SMART COMBI BOILER

12 KW WALL HUNG ELECTRIC

SMART SYSTEM BOILER

12 KW WALL HUNG ELECTRIC

SMART C





H:- 875 W:- 400 D:- 300

SMART N





H:- 875 W:- 400 D:- 300

Instantaneous & continuous hot water at 8Lt/min. Minimum 38-40 oC. Suitable for shower, can fill bath but may take longer.

Heating only. All components built in. Suitable for underfloor heating and radiators.










Elektra boilers are IMQ testedEquipmentcompliant CE Directive 2006/42 IEC60335-2-21:2012 with EC60335-1:2010 with EN60335-2-21:2003+A1:2005+A2:2008-EN60335-1:2012-EN62233:2008



SMART.C

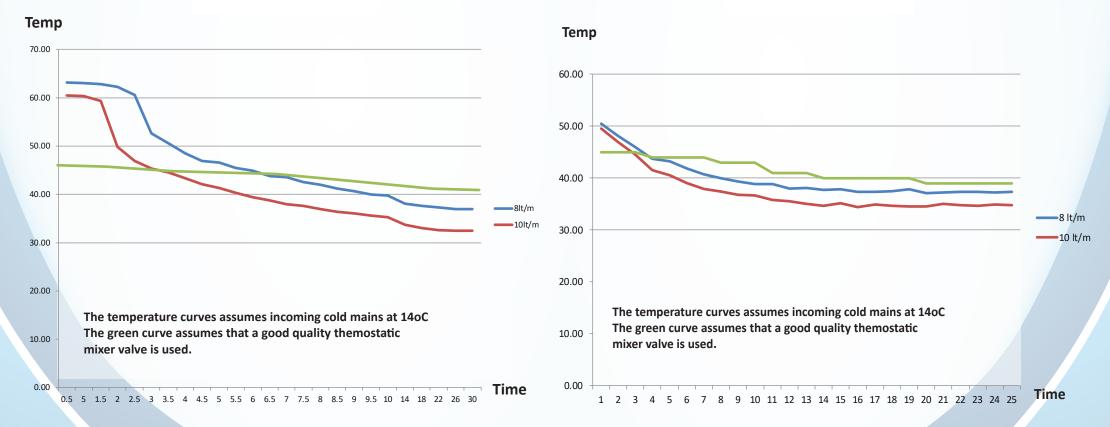

All Boilers are fully insulated ~ Instantaneous & continuous hot water ~ 230/240v single phase ~ 12kw, uses 50 Amps minimum 10 mm cable ~ Silent due to TRIAC based technology (D.E.S System) ~ can be used with radiators or underfloor heating Modulates from 2kW-12kW (Central heating) ~ Digitally displays temperatures ~ Anti-Legionella function

Hot water limited to 65°C (EK.BPL,EK.BPC) ~ Central Heating limited to 75°C

Boilers come with 2 years warranty